

Real-Time Geometric Glint Anti-Aliasing with Normal Map Filtering - Supplementary material

XAVIER CHERMAIN, SIMON LUCAS, BASILE SAUVAGE, and JEAN-MICHEL DISCHLER, Université de Strasbourg, CNRS, ICube UMR 7357, France
CARSTEN DACHSBACHER, Institute for Visualization and Data Analysis, Karlsruhe Institute of Technology, Germany

ACM Reference Format:

Xavier Chermain, Simon Lucas, Basile Sauvage, Jean-Michel Dischler, and Carsten Dachsbacher. 2021. Real-Time Geometric Glint Anti-Aliasing with Normal Map Filtering - Supplementary material. *Proc. ACM Comput. Graph. Interact. Tech.* 4, 1 (May 2021), 2 pages. <https://doi.org/10.1145/3451257>

1 IMPLEMENTING GGAA

Mirrored texture repetition must be activated, because only the positive part of the dictionary is stored in practice as distributions P_o are even functions. In the previous method [Chermain et al. 2020] this was not necessary, because point evaluation was restricted to the positive domain of P_o by inverting the negative components of the original half slope \tilde{h}_o . We also invert negative components, but now the textureGrad-functions are used and its associated original kernel K_o can overlap the negative domain, as illustrated in Figure 1, left. In this case, some lobes can be missed. Using the OpenGL texture parameter `GL_MIRRORED_REPEAT` instead of `GL_CLAMP_TO_BORDER` solves this issue (Figure 1, right).

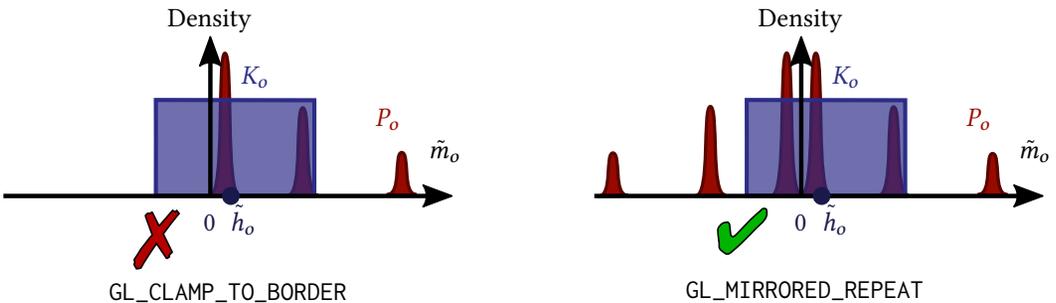


Fig. 1. When kernels K_o are used, the OpenGL texture parameter `GL_MIRRORED_REPEAT` must be used instead of `GL_CLAMP_TO_BORDER` to avoid incorrect filtering.

Authors' addresses: Xavier Chermain, chermain@unistra.fr; Simon Lucas, simon.lucas@etu.unistra.fr; Basile Sauvage, sauvage@unistra.fr; Jean-Michel Dischler, dischler@unistra.fr, Université de Strasbourg, CNRS, ICube UMR 7357, Illkirch, France, F-67400; Carsten Dachsbacher, dachsbacher@kit.edu, Institute for Visualization and Data Analysis, Karlsruhe Institute of Technology, Karlsruhe, Germany, 76131.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2021 Copyright held by the owner/author(s). Publication rights licensed to ACM.

2577-6193/2021/5-ART \$15.00

<https://doi.org/10.1145/3451257>

Conversely, using the mirrored texture repetition parameter also introduces an issue when the absolute original half slope $|\tilde{h}_o|$ and the derivatives $\Delta\tilde{h}/\Delta p$ have high values (Figure 2).

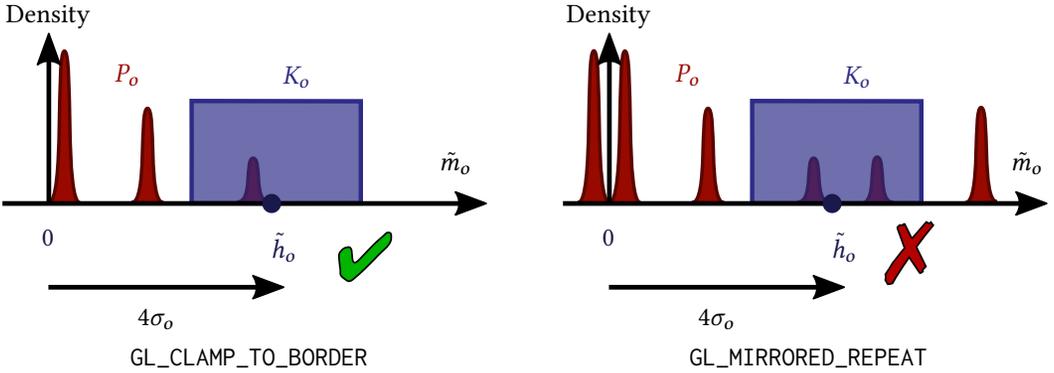


Fig. 2. The mirrored texture parameter introduces errors by infinitely repeating the distribution over its domain. Normally, after $4\sigma_o$, the distribution is zero.

In practice, this error is only possible when the kernel size is large, i.e. when derivatives in the half slope space are used. In fact, when the kernel center \tilde{h}_o is greater or equal to $4\sigma_o$, the value of the distribution is set to zero. Furthermore, by using finite differences of projected half vectors h_{\perp} , the kernel size is small when the absolute half slope is high (see Tokuyoshi and Kaplanyan [Tokuyoshi and Kaplanyan 2019] for more details). Therefore, the situation in Figure 2, right, should not occur.

REFERENCES

- Xavier Chermain, Basile Sauvage, Dischler Jean-Michel, and Carsten Dachsbacher. 2020. Procedural Physically-based BRDF for Real-Time Rendering of Glints. *Comput. Graph. Forum (Proc. Pacific Graphics)* 39, 7 (2020), 243–253.
- Yusuke Tokuyoshi and Anton S. Kaplanyan. 2019. Improved Geometric Specular Antialiasing. In *Proc. ACM SIGGRAPH Symposium on Interactive 3D Graphics and Games*.